


DIN ISO 2338 DOWEL PINS

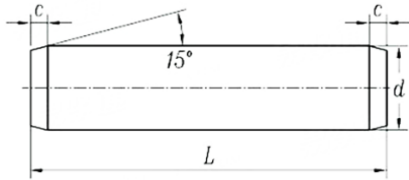

d		Φ0.6	Φ0.8	Φ1	Φ1.5	Φ2	Φ2.5	Φ3	Φ4	Φ5	Φ6
d - m6	Max	0.608	0,808	1.008	1.508	2.008	2.508	3.008	4.012	5.012	6.012
	Min	0.602	0,802	1.002	1.502	2.002	2.502	3.002	4.004	5.004	6.004
d - h8	Max	0.6	0,8	1.000	1.500	2.000	2.500	3.000	4.000	5.000	6.000
	Min	0.586	0,786	0.986	1.486	1.986	2.486	2.986	3.982	4.982	5.982
C		0.12	0.16	0.2	0.3	0.35	0.4	0.5	0.63	0.8	1.2
d		Φ8	Φ10	Φ12	Φ16	Φ20	Φ25	Φ30	Φ40	Φ50	
d - m6	Max	8.015	10.015	12.018	16.018	20.021	25.021	30.021	1.008	40.025	50.025
	Min	8.006	10.006	12.007	16.007	20.008	25.008	30.008	1.002	40.009	50.009
d - h8	Max	8.000	10.000	12.000	16.000	20.000	25	30	1.000	40.000	50.000
	Min	7.978	9.978	11.973	15.973	19.967	24.967	29.967	0.986	39.961	49.961
C		1.6	2	2.5	3	3.5	4	5	0.2	6.3	8

Length L: 2-200 mm

Material: Austenitic stainless steel A1 According to ISO 3506-1, Hardness 210 HV30~280 HV30

Hardness: 125 HV30 ~ 245 HV30

How to order : ISO 2338 d-h8 x L, ISO 2338 10-h8 x 300.